
GEA LUCE



CRISEIDE S/2D Q

FCRSB5Q - BIANCO - WHITE

TECHNICAL DATA
Installation: Interno _ Sospensione
Source: Led integrato
Power: 90W(40W+50W)
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ Taglio fase+Push non incl.
Lumen: 3600lm
Color Temperature: 3000K
Light Beam: 360°_ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D+E
Volume: 0,0932m3
Gross Weight: 10.10 Kg
Net Weight: 6.20 Kg

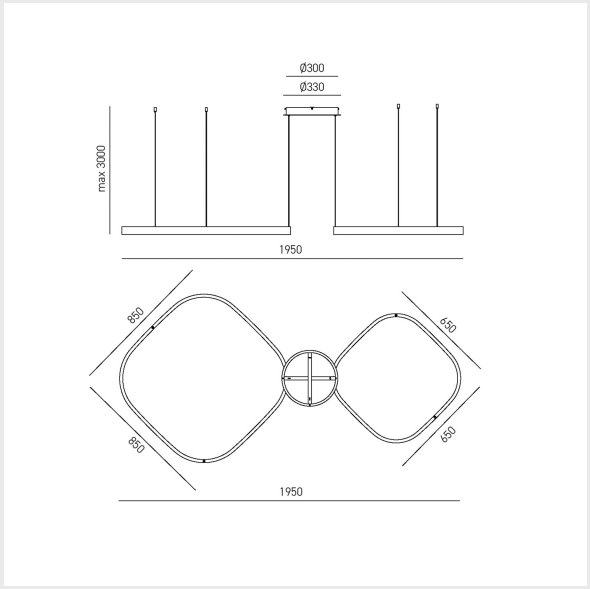


GEA LUCE



CRISEIDE S/2D Q

FCRSN5Q - NERO - BLACK

TECHNICAL DATA
Installation: Interno _ Sospensione
Source: Led integrato
Power: 90W(40W+50W)
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ Taglio fase+Push non incl.
Lumen: 4000lm
Color Temperature: 3000K
Light Beam: 360°_ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D+E
Volume: 0,0932m3
Gross Weight: 10.10 Kg
Net Weight: 6.20 Kg

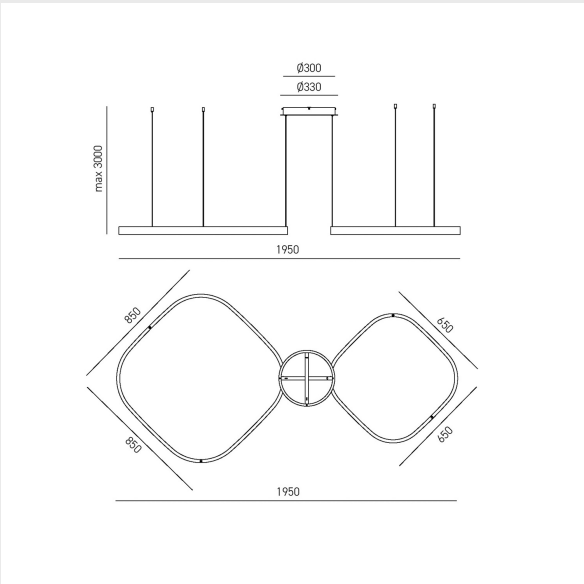


GEA LUCE



CRISEIDE S/2D Q

FCRSBE5Q - NEW-BEIGE

TECHNICAL DATA
Installation: Interno _ Sospensione
Source: Led integrato
Power: 90W(40W+50W)
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ Taglio fase+Push non incl.
Lumen: 5300lm
Color Temperature: 3000K
Light Beam: 360°_ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D+E
Volume: 0,0932m3
Gross Weight: 10.10 Kg
Net Weight: 6.20 Kg

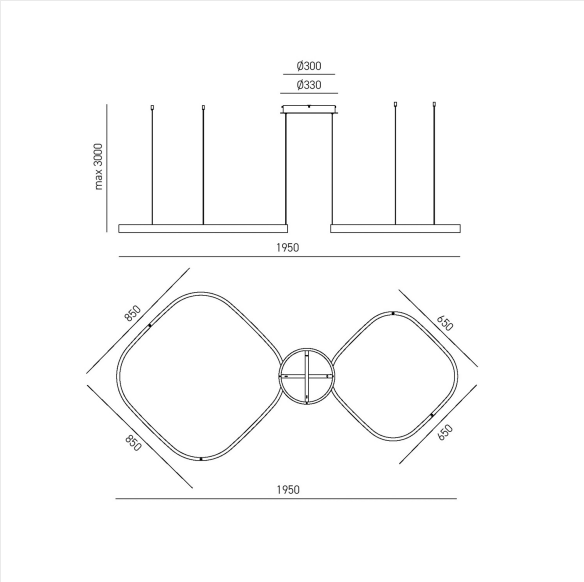


GEA LUCE



CRISEIDE S/2D Q

FCRSO5Q - ORO-SPAZZOLATO - BRUSHED GOLD

TECHNICAL DATA
Installation: Interno _ Sospensione
Source: Led integrato
Power: 90W(40W+50W)
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ Taglio fase+Push non incl.
Lumen: 3800lm
Color Temperature: 3000K
Light Beam: 360°_ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D+E
Volume: 0,0932m3
Gross Weight: 10.10 Kg
Net Weight: 6.20 Kg

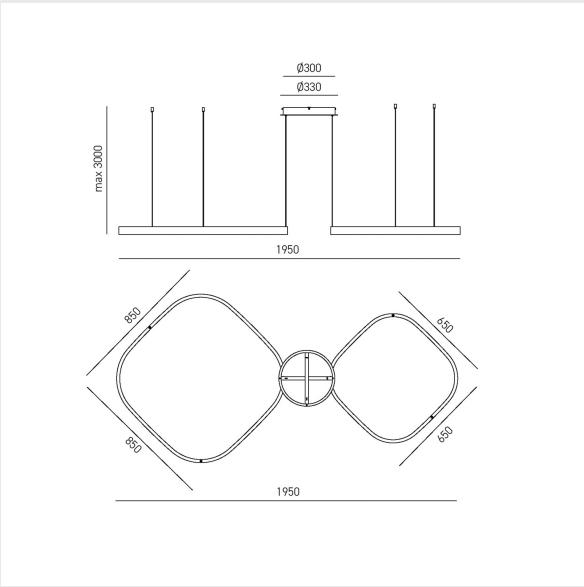

GEA LUCE



CRISEIDE S/2D Q

FCRSV5Q - VERDE-SALVIA

TECHNICAL DATA
Installation: Interno _ Sospensione
Source: Led integrato
Power: 90W(40W+50W)
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ Taglio fase+Push non incl.
Lumen: 3800lm
Color Temperature: 3000K
Light Beam: 360°_ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Energy Class: D+E
Volume: 0,0932m3
Gross Weight: 10.10 Kg
Net Weight: 6.20 Kg

