GEA LUCE



DIVA S/G

FDISB3 - BIANCO - WHITE


TECHNICAL DATA
Installation: Interno _ Sospensione
Source: Led integrato
Power: 42W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ Taglio fase+Push non incl.
Lumen: 2600lm
Color Temperature: 3000K
Light Beam: 360°_ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Gross Weight: 4.33 Kg
Net Weight: 2.20 Kg

Montatura in alluminio bianco satinato. Diffusore in silicone bianco opale. Sorgente luminosa led. dimmerabile tramite dimmer esterno + push (non inclusi).

Frame in satin white aluminum. Opal white silicone diffuser. LED light source. dimmable via external dimmer + push-button dimmer (not included).


Monture en aluminium blanc satiné. Diffuseur en silicone blanc opale. Source lumineuse à Led . dimmable via un variateur externe + poussoir (pas inclus).

Satinierter weißer Aluminiumrahmen. Opalweißer Silikondiffusor. Led-Lichtquelle. dimmbar über externen Dimmer + Push (nicht im Lieferumfang enthalten).

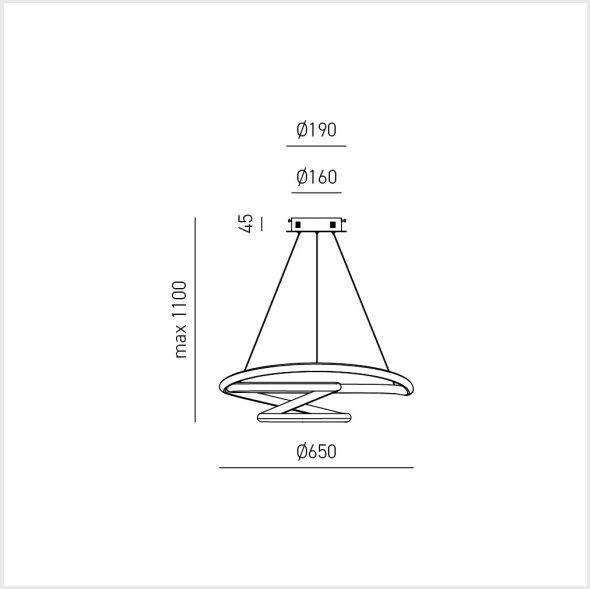

GEA LUCE



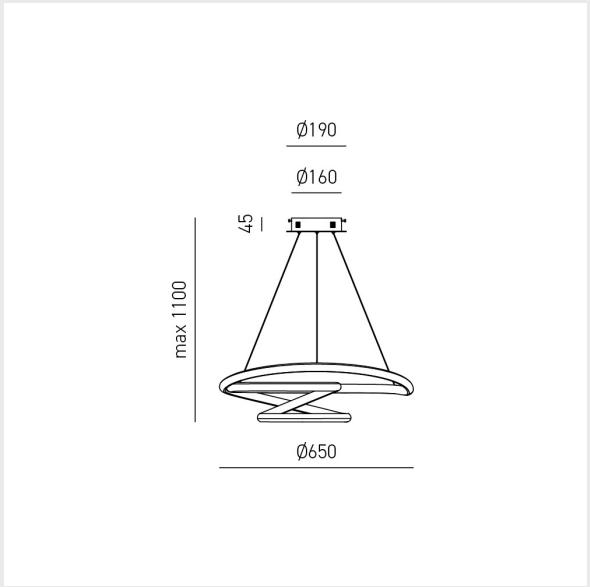

DIVA S/G

FDISO3 - ORO - GOLD

TECHNICAL DATA
Installation: Interno _ Sospensione
Source: Led integrato
Power: 42W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ Taglio fase+Push non incl.
Lumen: 2520lm
Color Temperature: 3000K
Light Beam: 360°_ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Gross Weight: 4.33 Kg
Net Weight: 2.20 Kg


Montatura in alluminio oro spazzolato. Diffusore in silicone bianco opale. Sorgente luminosa led. dimmerabile tramite dimmer esterno + push (non inclusi).

Frame in brushed gold aluminum. Opal white silicone diffuser. LED light source. dimmable via external dimmer + push-button dimmer (not included).

Monture en aluminium doré brossé. Diffuseur en silicone blanc opale. Source lumineuse à Led . dimmable via un variateur externe + poussoir (pas inclus).

Gebürsteter goldener Aluminiumrahmen. Opalweißer Silikondiffusor. Led-Lichtquelle. dimmbar über externen Dimmer + Push (nicht im Lieferumfang enthalten).

GEA LUCE

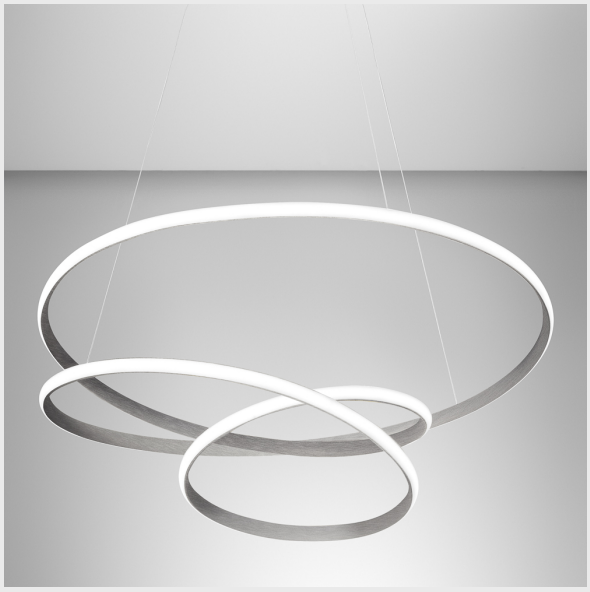

DIVA S/G

FDIST3 - TITANIO - TITANIUM

TECHNICAL DATA
Installation: Interno _ Sospensione
Source: Led integrato
Power: 42W
Power Supply: 220-240V AC _ 50/60Hz
Dimming: Dimmerabile _ Taglio fase+Push non incl.
Lumen: 2340lm
Color Temperature: 3000K
Light Beam: 360°_ Diffusa
CRI: >80
Lifespan: 30.000h
IP Rating: IP20
Insulation Class: I
Gross Weight: 4.33 Kg
Net Weight: 2.20 Kg

Montatura in alluminio titanio. Diffusore in silicone bianco opale. Sorgente luminosa led. dimmerabile tramite dimmer esterno + push (non inclusi).

Frame in titanium aluminum. Opal white silicone diffuser. LED light source. dimmable via external dimmer + push-button dimmer (not included).

Monture en aluminium titane. Diffuseur en silicone blanc opale. Source lumineuse à Led . dimmable via un variateur externe + poussoir (pas inclus).

Rahmen aus Titanaluminium. Opalweißer Silikondiffusor. Led-Lichtquelle. dimmbar über externen Dimmer + Push (nicht im Lieferumfang enthalten).

